



# 3.0 LITER | 3.8 LITER | 4.0 LITER COFFEE BREWING SYSTEM

## CBS-2130 TOUCHSCREEN SERIES



**CBS-2132XTS-3L**  
Dual Station Brewer\*

**CBS-2131XTS-3L**  
Single Station Brewer\*

\* Shown with #D041 Airpot Dispenser (sold separately)

The 3 Liter, 3.8 Liter and 4 Liter CBS-2131 / 2132 XTS Touchscreen Series Airpot Coffee Brewers are a perfect hot beverage solution for high volume self-service environments such as convenience stores, cafeterias, specialty coffee shops or office coffee service (OCS). Now experience total control of this fully featured Extractor® Brewing System via an inviting touchscreen interface display that is intuitive, easy to read and simple to navigate.



**CBS-2132XTS-3.8/4.0L**  
Dual Station Brewer\*


**CBS-2131XTS-3.8/4.0L**  
Single Station Brewer\*

\* Shown with #D063 Airpot Dispenser and #D051 Luxus® Thermal Server (sold separately)

# Perfect taste begins with a simple touch...

## User Friendly Touchscreen

Access all controls via an inviting touchscreen interface display that blends intuitive icons with dynamic time and volume data to provide instant visual feedback at any point during programming, diagnostics or the brew cycle.

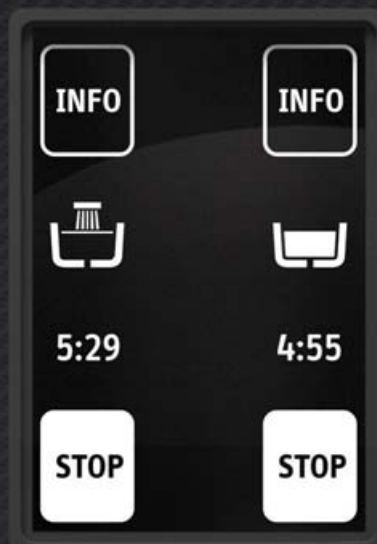

## Streamlined Programming, Diagnostics and Metrics

The Extractor® Touchscreen Operating System (ETOS) was engineered for quick and efficient navigation through set-up, programming, diagnostics and daily operational brewing modes.



## Customizable Screens

Customize the start screen to tie your equipment and product offerings into a consistent brand message. You can also create and display individual recipe names for quick and easy access to your most used coffee blends.





## XTS™ Series

Driven by a user friendly touchscreen interface and intuitive software, the XTS series represents the next step in the evolution of FETCO's renown EXTRACTOR brewing technology.



## Legendary Extractor® Control

Although designed specifically for smaller batch airport dispensing, these high quality brewers possess the legendary features and reliable performance you've come to expect from Extractor® branded products.



## Modern Convenience

Duplicate profiles and parameters to and from any of the batch buttons on a single machine or copy the information to an unlimited number of brewers via a removable SD card (Sold separately).



## Cascading Spray Dome™

Hot tank water flows over clog-free channels built into the dome and virtually eliminates spray head scale buildup – a leading reason for service calls.



## Contemporary Design

Sleek European cabinet design is attractive and fits well in any front-of-house decor found in cafes, lounges, OCS or corporate breakrooms.



## Flexible Dispensing

Designed for flexibility and portability, Luxus® Thermal Servers and vacuum lined pump lever airpots quickly turn virtually any remote location into a hot and fresh beverage service station.

**L3S-10 Luxus® Thermal Server**



**Vacuum Lined Stainless Steel Airpot**



## Water Specification

Water Inlet 3/8" Male Flare Fitting	Minimum Flow Rate 5.7 lpm	Water Pressure 20-75 psig [138-517 kPa]
--	------------------------------	--


## Electrical Configuration

Configuration Code	Basket	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Liter / Hour
Plastic Basket		Stainless Steel Basket							
<b>NORTH AMERICA</b>									
E213193	E213193M	1 x 1.5 kW	100-120	1	2+G	1.6	NEMA 5-15P	13.0	14.8 <sup>(1)</sup>
E213194	E213194M	1 x 1.7 kW	100-120	1	2+G	1.8	NEMA 5-15P	14.7	16.7 <sup>(1)</sup>
E213195	E213195M	1 x 2.3 kW	100-120	1	2+G	2.4	NEMA 5-20P	19.7	22.0 <sup>(1)</sup>
<b>INTERNATIONAL</b>									
E213190	E213190M	1 x 2.3 kW	200-240	1	2+G	2.4	Hardwired	10.0	22.0 <sup>(1)</sup>
E213191	E213191M	1 x 3.0 kW	200-240	1	2+G	3.1	Hardwired	13.0	29.1 <sup>(1)</sup>
<b>JAPAN</b>									
E213180	E213180M	1 x 2.3 kW	100	1	2+G	1.7	Hardwired	16.7	14.0 <sup>(1)</sup>
E213181	E213181M	1 x 2.3 kW	200	1	2+G	1.7	Hardwired	8.3	21.0 <sup>(1)</sup>
E213182	E213182M	1 x 3.0 kW	200	1	2+G	2.2	Hardwired	10.8	28.0 <sup>(1)</sup>
<b>CE</b>									
E213169	E213169M	1 x 2.3 kW	230	1	L / N / PE	2.2	Hardwired	9.6	22.0 <sup>(1)</sup>
E213167	E213167M	1 x 3.0 kW	230	1	L / N / PE	2.8	Hardwired	12.4	29.1 <sup>(1)</sup>

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 93°C water. 3 liters per batch.

## Measurements

Height 66 cm	Width 31 cm	Depth 52 cm	Empty Weight 13 kg	Filled Weight 25 kg	Combined Filled Weight 34 kg <small>BREWER + 1 FILLED D041 DISPENSER</small>	Hot Water Tank Cap. 12.4 l	Shipping Weight 18 kg	Shipping Dimensions 41 x 59 x 74 cm
-----------------	----------------	----------------	-----------------------	------------------------	--	-------------------------------	--------------------------	--

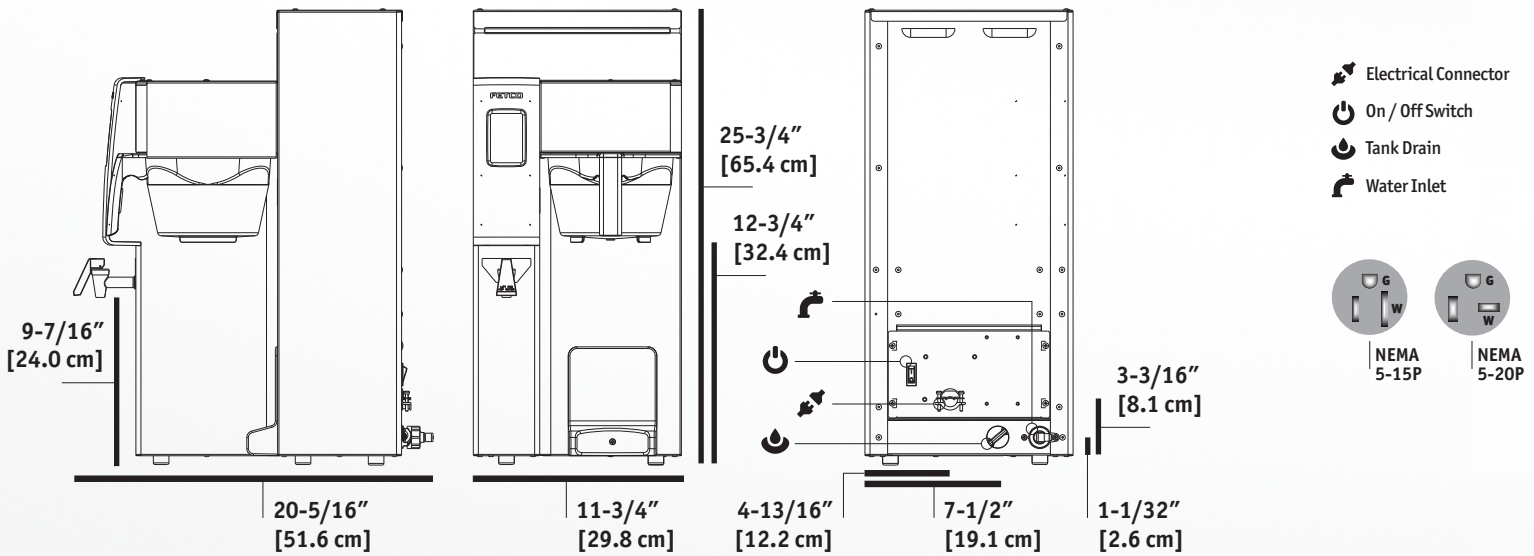

## Compatible Dispenser

#D041  
3.0L Thermal Pump  
Lever Airpot



Product DIMS  
Height: 36.8 cm  
Width: 17.8 cm  
Depth: 22.9 cm  
Weight  
Empty: 2.1 kg  
Filled: 5.1 kg

## Coffee Filter

#F002  
13" x 5" Paper  
Coffee Filter



## Brew Basket

#B012218B1  
13" x 5"  
Stainless Steel



#B014218BN2  
13" x 5"  
Plastic w/ Brown Insert



## Add Color Tabs

Handle I.D. Insert



Blue: 1023.00180.00  
Red: 1023.00190.00



Green: 1023.00191.00  
Orange: 1023.00192.00



## Water Specification

Water Connection Inlet 3/8" Male Flare Fitting	Minimum Flow Rate 5.7 lpm	Water Pressure 20-75 psig [138-517 kPa]
---	------------------------------	--


## Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Liter / Hour
Plastic Basket   Stainless Steel Basket								
<b>NORTH AMERICA &amp; INTERNATIONAL</b>								
E213290	E213290M	2 x 2.3 kW	200-240	1	2+G	3.3-4.7	16.5-19.7	43.5 <sup>(1)</sup>
E213291	E213291M	2 x 3.0 kW	200-240	1	2+G	4.2-6.1	21.3-25.5	54.1 <sup>(1)</sup>
<b>JAPAN</b>								
E213280	E213280M	2 x 2.3 kW	200	1	2+G	3.3	16.3	42.0 <sup>(1)</sup>
E213281	E213281M	2 x 3.0 kW	200	1	2+G	4.2	21.3	56.0 <sup>(1)</sup>
<b>CE</b>								
E213265	E213265M	2 x 2.3 kW	230/400	2	2L / N / PE	4.3	9.6	42.0 <sup>(1)</sup>
E213262	E213262M	2 x 3.0 kW	230/400	2	2L / N / PE	5.6	12.4	56.0 <sup>(1)</sup>
E213268	E213268M	2 x 2.3 kW	230	1	L / N / PE	4.3	18.8	42.0 <sup>(1)</sup>
E213266	E213266M	2 x 3.0 kW	230	1	L / N / PE	5.6	24.4	56.0 <sup>(1)</sup>

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 93°C water. 3 liters per batch.

## Measurements

Height 66 cm	Width 50 cm	Depth 52 cm	Empty Weight 21 kg	Filled Weight 41 kg	Combined Filled Weight 51 kg <small>BREWER + 2 FILLED D041 DISPENSERS</small>	Hot Water Tank Cap. 22.1 l	Shipping Weight 26 kg	Shipping Dimensions 59 x 64 x 74 cm
-----------------	----------------	----------------	-----------------------	------------------------	---	-------------------------------	--------------------------	--

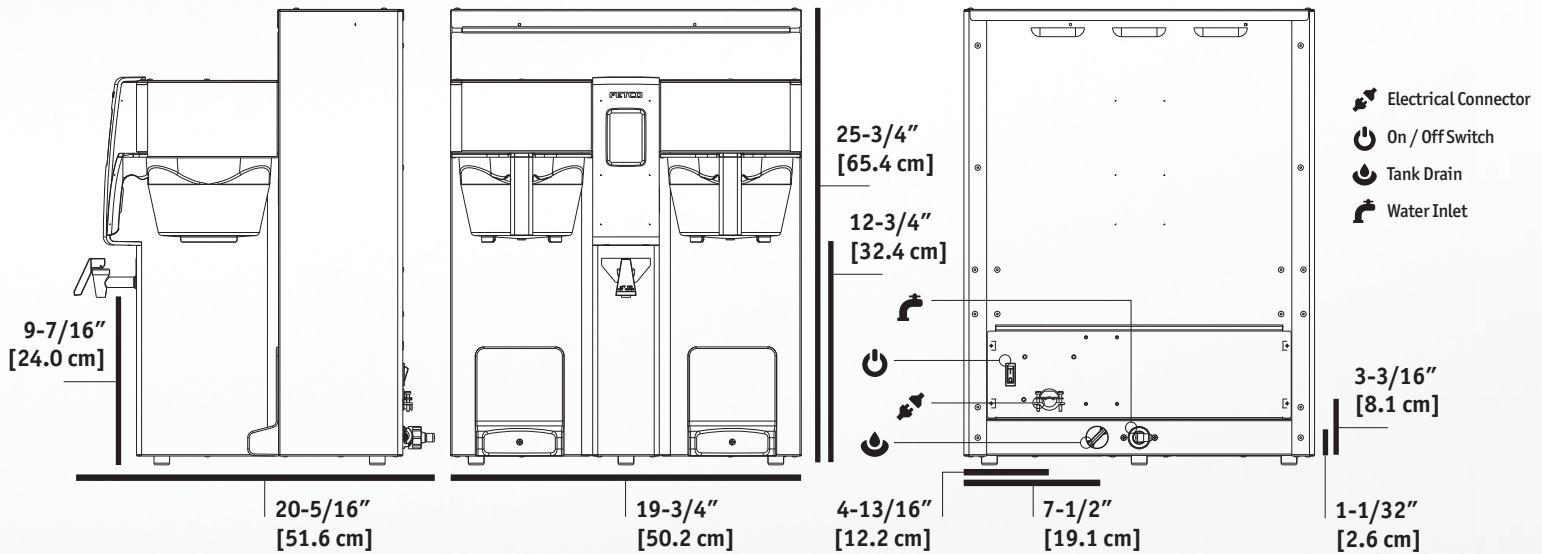

## Compatible Dispenser

#D041  
3.0L Thermal Pump  
Lever Airpot



Product DIMS  
Height: 36.8 cm  
Width: 17.8 cm  
Depth: 22.9 cm  
Weight  
Empty: 2.1 kg  
Filled: 5.1 kg

## Coffee Filter

#F002  
13" x 5" Paper  
Coffee Filter



## Brew Basket

#B012218B1  
13" x 5"  
Stainless Steel



#B014218BN2  
13" x 5"  
Plastic w/ Brown Insert



## Add Color Tabs

Handle I.D. Insert



Blue: 1023.00180.00  
Red: 1023.00190.00



Green: 1023.00191.00  
Orange: 1023.00192.00

## Water Specification

Water Inlet 3/8" Male Flare Fitting	Minimum Flow Rate 5.7 lpm	Water Pressure 20-75 psig [138-517 kPa]
--	------------------------------	--


## Electrical Configuration

Configuration Code	Basket	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Liter / Hour
Plastic Basket		Stainless Steel Basket							
<b>NORTH AMERICA</b>									
E213196	E213196M	1 x 2.3 kW	100-120	1	2+G	1.7-2.4	NEMA 5-20P	16.5-19.7	22.0 <sup>(1)</sup>
<b>INTERNATIONAL &amp; JAPAN</b>									
E213197	E213197M	1 x 2.3 kW	200-240	1	2+G	1.7-2.4	Hardwired	16.5-19.7	22.0 <sup>(1)</sup>
E213192	E213192M	1 x 3.0 kW	200-240	1	2+G	2.2-3.1	Hardwired	10.9-13.0	29.1 <sup>(1)</sup>
<b>CE</b>									
E213168	E213168M	1 x 3.0 kW	230	1	L / N / PE	2.8	Hardwired	12.4	29.1 <sup>(1)</sup>

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 93°C water. 4 liters per batch.

## Measurements

Height 71 cm	Width 31 cm	Depth 52 cm	Empty Weight 13 kg	Filled Weight 25 kg	Combined Filled Weight 35 kg <small>BREWER + 1 FILLED D063 DISPENSER</small>	Hot Water Tank Cap. 12.4 l	Shipping Weight 18 kg	Shipping Dimensions 41 x 59 x 74 cm
-----------------	----------------	----------------	-----------------------	------------------------	---	-------------------------------	--------------------------	--

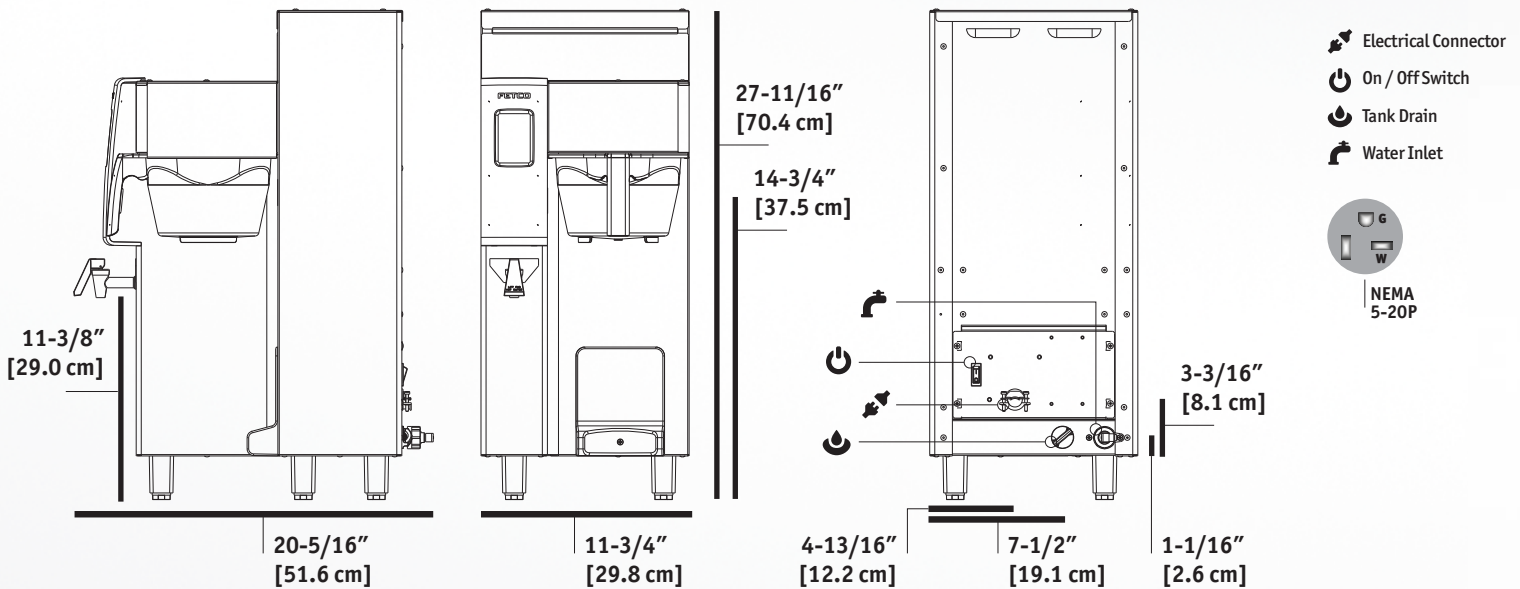

## Compatible Dispenser & Serving Station

**#D063**  
3.8L Thermal Pump Lever Airpot

Product DIMS [H x W x D]  
47.0 x 17.8 x 22.9 cm  
Weight  
Empty: 4.1 kg  
Filled: 6.0 kg

**#D051**  
LUXUS® Thermal Server (L3S-10)  
Must be used with S3S Serving Stations.

Product DIMS [H x W x D]  
33.8 x 20.3 x 26.0 cm  
Weight  
Empty: 2.5 kg  
Filled: 6.7 kg

**#A093**  
S3S-10-1 Single Serving Station for L3S-10

**#A094**  
S3S-10-2 Twin Serving Station for L3S-10

**#A096**  
S3S-10-3 Triple Serving Station for L3S-10

## Coffee Filter

**#F002**  
13" x 5" Paper Coffee Filter

## Brew Basket

**#B012218B1**  
13" x 5" Stainless Steel

**#B014218BN2**  
13" x 5" Plastic w/ Brown Insert

## Add Color Tabs

Handle I.D. Insert

Blue: 1023.00180.00

Red: 1023.00190.00

Green: 1023.00191.00

Orange: 1023.00192.00



## Water Specification

Water Inlet 3/8" Male Flare Fitting	Minimum Flow Rate 5.7 lpm	Water Pressure 20-75 psig [138-517 kPa]
--	------------------------------	--


## Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Liter / Hour
Plastic Basket   Stainless Steel Basket NORTH AMERICA, INTERNATIONAL & JAPAN								
E213292	2 x 3.0 kW	200-240	1	2+G	4.2-6.1	Hardwired	21.3-25.5	54.0 <sup>(1)</sup>
E213264	2 x 2.3 kW	230/400	2	2L / N / PE	4.3	Hardwired	9.6	42.0 <sup>(1)</sup>
E213263	2 x 3.0 kW	230/400	2	2L / N / PE	5.6	Hardwired	12.4	56.0 <sup>(1)</sup>
E213269	2 x 2.3 kW	230	1	L / N / PE	4.3	Hardwired	18.8	42.0 <sup>(1)</sup>
E213267	2 x 3.0 kW	230	1	L / N / PE	5.6	Hardwired	24.4	56.0 <sup>(1)</sup>

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 93°C water. 4 liters per batch.

## Measurements

Height 71 cm	Width 51 cm	Depth 52 cm	Empty Weight 21 kg	Filled Weight 42 kg	Combined Filled Weight 52 kg <small>BREWER + 2 FILLED D063 DISPENSERS</small>	Hot Water Tank Cap. 22.1 l	Shipping Weight 26 kg	Shipping Dimensions 59 x 64 x 74 cm
-----------------	----------------	----------------	-----------------------	------------------------	--	-------------------------------	--------------------------	--

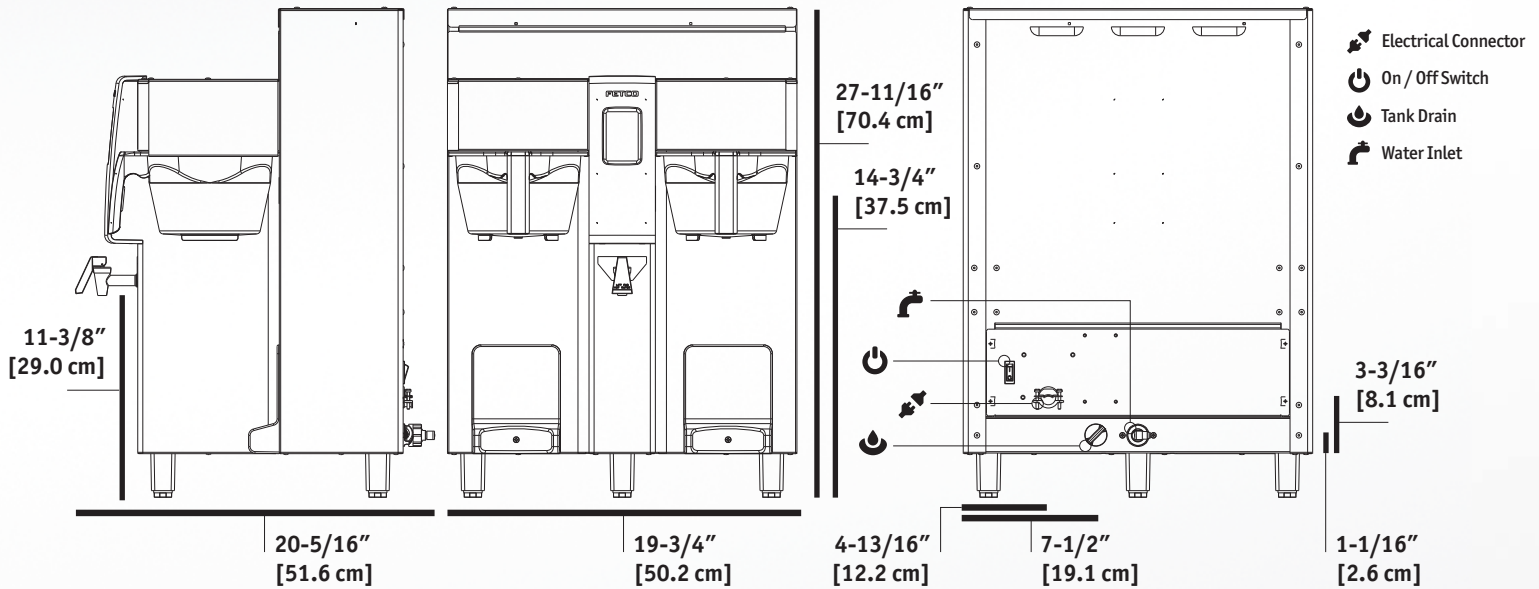

## Compatible Dispenser & Serving Station

#D063  
3.8L Thermal  
Pump Lever  
Airpot



Product DIMS  
[H x W x D]  
47.0 x 17.8 x 22.9 cm  
Weight  
Empty: 4.1 kg  
Filled: 6.0 kg

#D051  
LUXUS® Thermal  
Server (L3S-10)  
Must be used with  
S3S Serving Stations.



Product DIMS  
[H x W x D]  
33.8 x 20.3 x 26.0 cm  
Weight  
Empty: 2.5 kg  
Filled: 6.7 kg

#A093  
S3S-10-1 Single  
Serving Station  
for L3S-10



#A094  
S3S-10-2 Twin  
Serving Station  
for L3S-10



#A096  
S3S-10-3 Triple  
Serving Station  
for L3S-10



## Coffee Filter

#F002  
13" x 5" Paper  
Coffee Filter



## Brew Basket

#B012218B1  
13" x 5"  
Stainless Steel



#B014218BN2  
13" x 5"  
Plastic w/ Brown Insert



## Add Color Tabs

Handle I.D. Insert



Blue: 1023.00180.00  
Red: 1023.00190.00



Green: 1023.00191.00  
Orange: 1023.00192.00

# Features & Benefits



	Feature	Benefit
1	Touchscreen Interface	Allows for quick and easy access to brew controls.
2	Brew Basket Sensors	Automatically discontinues operation of brew cycle if basket is removed.
3	Mixed Material Construction	Mixed material is attractive and comfortable in any front-of-house setting.
4	Manual Water Faucet	Safely dispenses hot water away from steam and brew basket.
5	Stainless Steel Finish	Withstands the harshest foodservice environments and is durable and easy to clean.
6	Fixed Dispenser Guide	Helps position airpot directly under brew basket drip hole for spill free brewing.

Dispensers sold separately.